


WING20 FLANSCH GERADE

LED Einbauprofil

■ SILBER



Kühlmasse: 307 g/m | Das WING20 mit seitlichem, geraden Flansch kann mit Installationskanälen für Rigips-Platten mit 12,5 mm und 15 mm kombiniert verbaut werden. Hochwertige Verbinder ermöglichen eine professionelle Montage von komplexen Lichtlösungen mit LED Lichtleisten. Flache und hohe Abdeckungen verfügbar; ausgezeichnete Wärmeableitung!

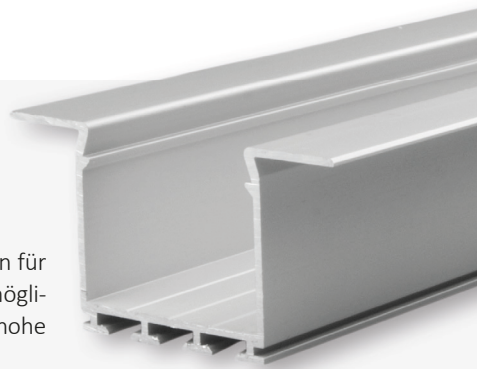

PROFIL

■ 2 m 112264

Einbaufeder 112270

VERBINDER

90° Horizontal 112549

90° Vertikal 112552

180° 112551

135° Horizontal 112550

135° Vertikal 112553

ABDECKUNGEN

COVER ECKIG

65 % | opal/satiniert

2 m 111742

COVER RUND

65 % | opal/satiniert

2 m 111741

COVER FLACH

65 % | opal/satiniert

2 m 112268

ENDKAPPEN

COVER flach | PVC

■ 112271

COVER FLACH

85 % | klar

2 m 112267

ENDKAPPEN

COVER flach | PVC

■ 112271

INSTALLATIONSKANAL


INSTALLATIONSKANAL

■ 2 m | 12,5 mm 112334

■ 2 m | 15 mm 112589

ZUBEHÖR

Montageclip 112335

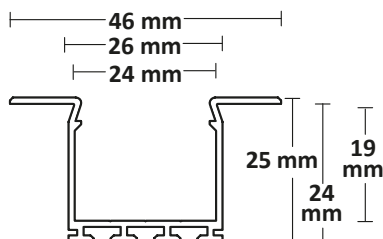

PROFIL

200 CM

COVER ECKIG

65 %

COVER RUND

65 %

COVER FLACH

65 %

COVER FLACH

85 %

INSTALLATION KANAL 12,5 MM

FÜR 12,5 MM
RIGIPS-PLATTEN

INSTALLATION KANAL 15 MM

FÜR 15 MM
RIGIPS-PLATTEN




WING20 FLANSCH STRAIGHT

LED Recessed profile

■ SILVER



Cooling mass: 307 g/m | The WING20 with lateral, straight flange can be used in combination with installation ducts for 12.5 mm and 15 mm sheetrock. High-quality connectors enable professional installation of complex lighting solutions with LED light strips. Flat and high covers available; excellent heat dissipation!

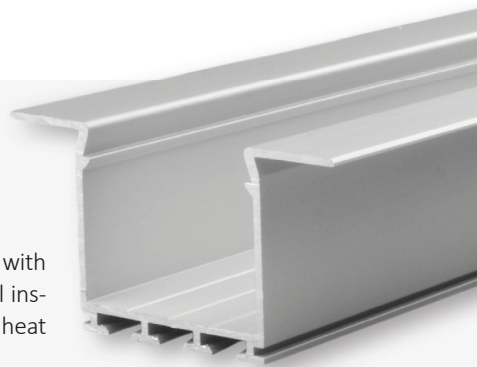

PROFILE

■ 2 m 112264

Installation spring
112270

CONNECTOR

90° Horizontal 112549

90° Vertical 112552

180° 112551

135° Horizontal 112550

135° Vertical 112553

COVERS

COVER SQUARE

65 % | opal/satinised

2 m 111742

COVER ROUND

65 % | opal/satinised

2 m 111741

COVER FLAT

65 % | opal/satinised

2 m 112268

END CAPS

COVER flat | PVC

■ 112271

COVER FLAT

85 % | clear

2 m 112267

END CAPS

COVER flat | PVC

■ 112271

INSTALLATION CHANNEL


INSTALLATION CHANNEL

■ 2 m | 12,5 mm 112334

■ 2 m | 15 mm 112589

ACCESSORIES

Installation clip 112335

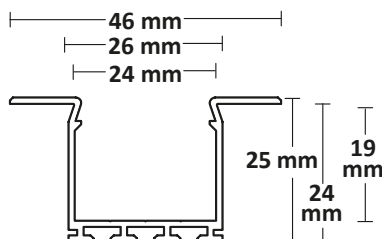

PROFILE

200 CM

COVER SQUARE

65 %

COVER ROUND

65 %

COVER FLAT

65 %

COVER FLAT

85 %

INSTALLATION CHANNEL 12,5 MM

FOR 12,5 MM
PLASTERBOARD

INSTALLATION CHANNEL 15 MM

FOR 15 MM
PLASTERBOARD

